


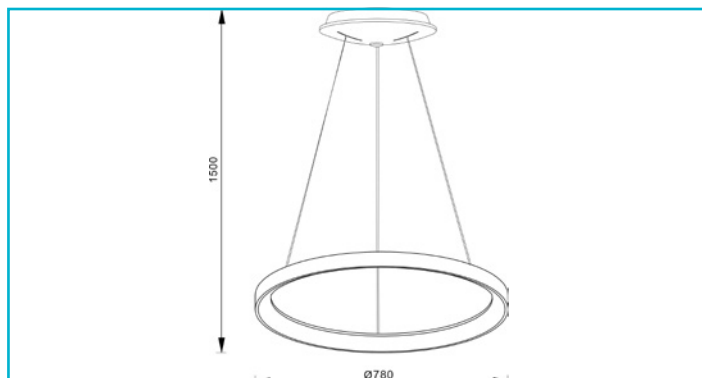

The pendant lamps of the new MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 400, 600 and 800 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The outside is finished in brushed aluminium in the colours white, silver, coffee and black.

Special features

- High luminous flux
- Light colour adjustable in 2 stages
- Suspended mounting up to 1,800 mm

Housing Material	Aluminium
Housing Color	Coffee
Housing Surface	Brushed
Material of Lens	Acryl
Colour of Lens	White
Surface Structure of Lens	Opal
Protection Class	Protection class I/protective grounding
Rated Input	60 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control technology	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20

Life Time L70 / B50	30000 h
Switching Cycles	25000
Power Consumption	50 kWh/1000h
EEI	E

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	5020 lm
Rated Angle of Reflection	130 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	35 mm
Diameter	780 mm
Base height	65 mm
Base diameter	230 mm
Pendulum Length max.	1500 mm