


Surface-mounted wall light
Uria 10 Up and Down, 11.2 W, 3,000 K, dark grey


 IP65


Housing Material	Aluminium
Housing Color	Dark grey
Colour of Lens	White
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	11.2 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No
Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	408 lm
Luminous Efficiency	36.4 lm/W
Rated Angle of Reflection	120 Degree
Distribution Characteristic 120°	NDLS
Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below
Length	300 mm
Width	97 mm
Height	120 mm
Base length	270 mm

Base L x W x H	270 x 20 x 85 mm
Base width	20 mm
Base height	85 mm
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65
Max. units per MCB B10	57 PCS
Max. units per MCB B16	91 PCS
Max. units per MCB C10	66 PCS
Max. units per MCB C16	106 PCS
Life Time L70 / B50	30000 h
Switching Cycles	8000
Power Consumption	12 kWh/1000h
EEI	G

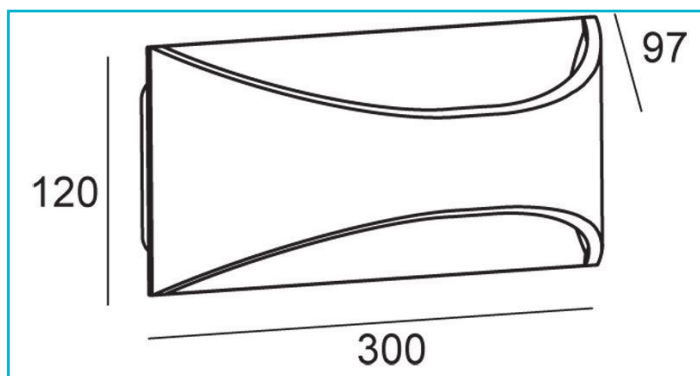