


Display case light
Herculis Triple 250 mm, 3 W, 4,000 K, silver

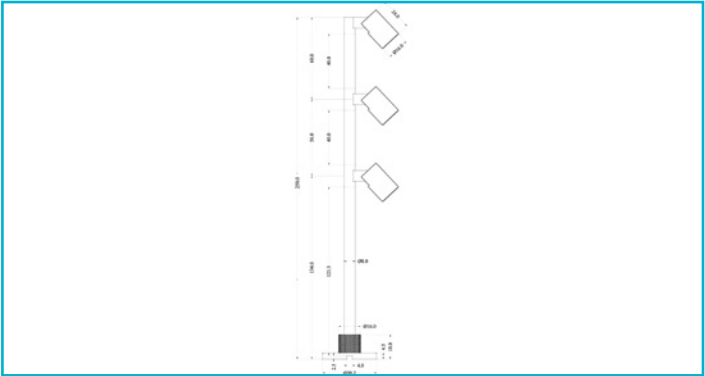

Little helper, big effect. With the HERCULIS display lights in a high-quality aluminium housing, you can reach all corners of a display case. To do so, the lamp head with its 40° light emission angle can be freely rotated and swivelled in any direction. In addition, the intelligent cable routing and the ready-to-use system enable easy surface and recessed mounting in display cases, counters, sales areas or in living rooms.

- Special features**
- High performance with compact design
 - Rotating and swivelling heads
 - for recessed and surface mounting thanks to intelligent cable routing
 - Ready-to-plug-in system

Housing Material	Aluminium	Base height	4.5 mm
Mounting Type	Top mounting	Base H x Ø	4.5 x 39.2 mm
Mounting Location	Inside	Base diameter	39.2 mm
Protection Class	Protection class III/safety extra-low voltage	Working Temperature	-10 to 45 °C
Operating Mode	Constant current	Storage Temperature	-10 to 45 °C
Rated Input	3 W	IP Protection Class	IP 20
Rated Input Voltage	9 V/DC	Life Time L70 / B50	30000 h
Rated Current	350 mA	Switching Cycles	50000
Power Supply Unit incl.	No	Power Consumption	3 kWh/1000h
Connection Cable Secondary	Yes	EEI	G
Secondary Cable Length	1 m		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	90		
Rated Luminous Flux	290 lm		
Luminous Efficiency	96.7 lm/W		
Rated Angle of Reflection	30 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	350 Degree		
Light Exit Surfaces	3		
Light characteristics	Direct		
Light direction	Below		
Height	250 mm		
Diameter	39.2 mm		

