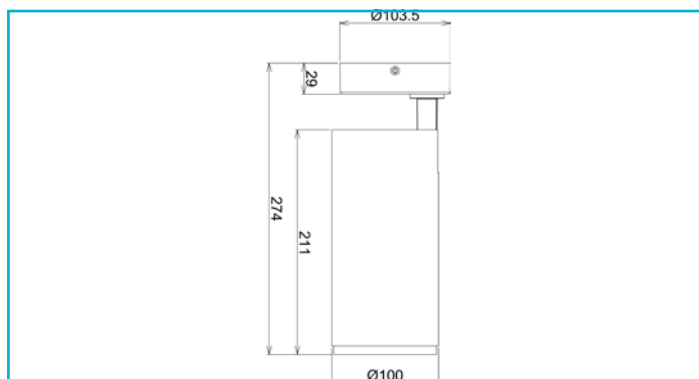


Surface-mounted ceiling light
Lucea 30 CCT, Tilt, 30 W, DIM, 3000/4000 K, white


The ceiling lights from the LUCEA series with CCT are available with outputs of 6, 10, 15, 20 and 30 W. They provide up to 2,900 lumens of light output depending on the version. The light emission angle can be narrowed or expanded by changing the optionally available lenses. A CCT switch allows the colour temperature to be set to one of two levels.

Special features

- Incl. black reflector ring
- Comprehensive range of accessories for customisation
- Light colour adjustable in two steps

Housing Material	Aluminium	Light direction	Below
Housing Color	White	Height	274 mm
Material of Lens	PMMA	Diameter	100 mm
Halogen free	No	Working Temperature	-20 to 40 °C
Mounting Type	Top mounting	Storage Temperature	-20 to 65 °C
Mounting Location	Inside	IP Protection Class	IP 20
Mounting Area	Ceiling installation	IK Protection Class	IK03
Protection Class	Protection class I/ protective grounding	Max. units per MCB B10	34 PCS
Rated Input	30 W	Max. units per MCB B16	54 PCS
Rated Power Consumption Standby	0.5 W	Max. units per MCB C10	34 PCS
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Max. units per MCB C16	54 PCS
Power Supply Unit incl.	Yes	Life Time L70 / B50	50000 h
Dimmable	Yes	Switching Cycles	100000
Control	Leading-edge dimmer, Trailing-edge dimmer	Power Consumption	30 kWh/1000h
Motion Detector	No	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class F.
Light Source	LED, Light source changeable TC		
Color Temperature	3000/4000 K		
Colour Consistency	5 SDCM		
Colour consistency light source	5 SDCM		
CRI (Ra)	90		
Rated Luminous Flux	2700/2900 lm		
Luminous Efficiency	96.7 lm/W		
Rated Angle of Reflection	36 Degree		
UGR	13		
Distribution Characteristic 120°	DLS		
Swivel Angle	90 Degree		
Rotation Angle	350 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		

