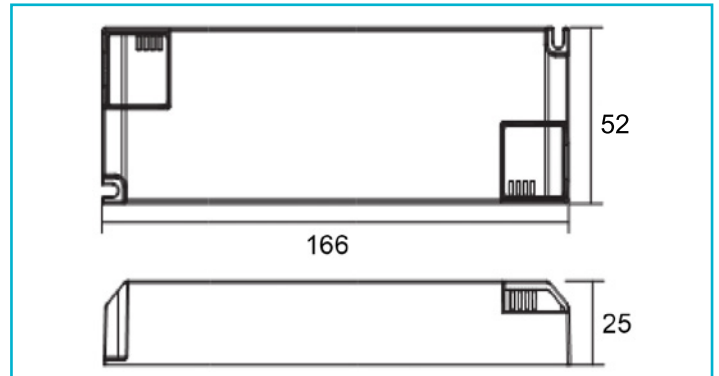


**Power supply unit (CC, DC) dimmable
BASIC, DIM, CC, D130050NTF/50 W**
**Special features**

- Can be dimmed using trailing-edge phase dimmers
- Flicker-free
- Short circuit, overload and overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Product weight	236 g
-----------------------	-------

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	25.0-50 W
Output Voltage	20-39 V/DC
Output Current	1300 mA
Dimmable	Yes
Control	Trailing-edge dimmer
Number of Channels	1
Power Factor	0.98

Max. units per MCB B10	31
Max. units per MCB B16	50
Max. units per MCB C10	31
Max. units per MCB C16	50
Inrush Current max.	5 A / 300 µs
Capacitive Load	35.58 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Life Time	50000 h
------------------	---------

Length	166 mm
Width	52 mm
Height	25 mm

