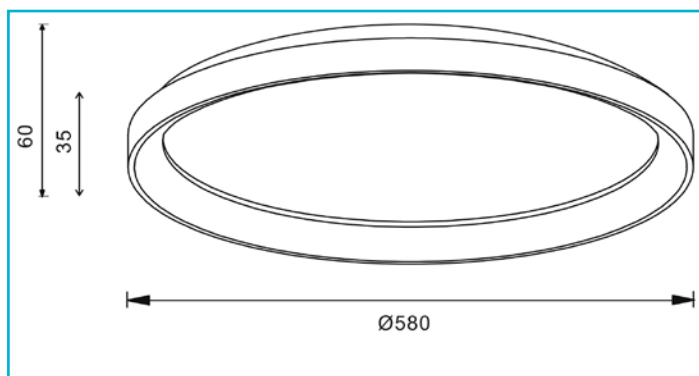


Surface-mounted ceiling light
Merope 600, 42 W, DIM, 3,000/4,000 K, dark brown


The timeless MEROPE demonstrates not only impressively high luminous flux and a low assembly height, it is also highly visually appealing thanks to its elegant outer aluminium ring – available in sandblasted white or black, brushed in silver or on-trend coffee. Available in the diameters 400 mm, 600 mm and 800 mm, the MEROPE can be integrated into very different environments even more flexibly.

In addition, the light colour can be adjusted in 2 stages, 3,000 K or 4,000 K.

Special features

- High luminous flux
- Light colour adjustable in 2 stages
- Low assembly height

Housing Material	Aluminium
Housing Color	Dark brown
Surface structure	Brushed
Material of Lens	Acryl
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	42 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Max. units per MCB B10	35 PCS
Max. units per MCB B16	56 PCS
Max. units per MCB C10	74 PCS
Max. units per MCB C16	118 PCS

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	3100/3200 lm
Luminous Efficiency	76.2 lm/W
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Height	60 mm
Diameter	580 mm

Working Temperature	-10 to 45 °C
----------------------------	--------------

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	42 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

