


Surface-mounted wall light
Rilongo closed Up and Down, 1x max. 15 W E27, brown



Housing Material	Aluminium	Storage Temperature	-20 to 45 °C
Housing Color	Brown	IP Protection Class	IP 54
Material of Lens	Polycarbonate - PC	IK Protection Class	IK05
Colour of Lens	White		
Mounting Type	Top mounting		
Mounting Location	Outside		
Mounting Area	Wall installation		
Ultraviolet resistance	Yes		
Protection Class	Protection class I/ protective grounding		
max. Power	1x max. 15 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Socket Description	E27		
Socket Quantity	1 PCS		
Number of Cable Entries	1 PCS		
Dimmable	Yes		
Control	Dimmable via optional light source		
Motion Detector	No		
Height of Illuminant to be used max.	195 mm		
Diameter of Illuminant to be used max.	70 mm		
Execution	Without lamp		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Length	103 mm		
Width	250 mm		
Height	110 mm		
Product weight	1050 g		
Working Temperature	-20 to 45 °C		

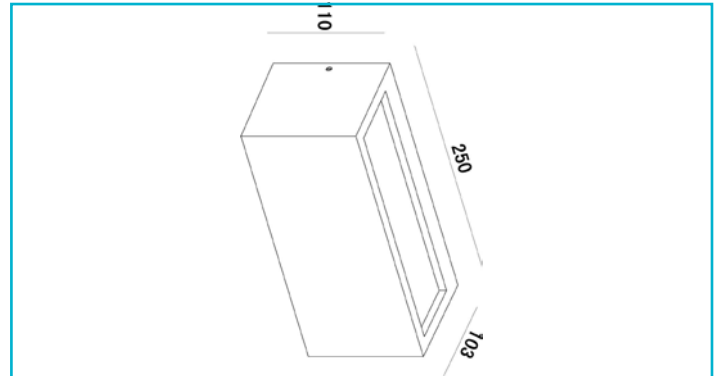