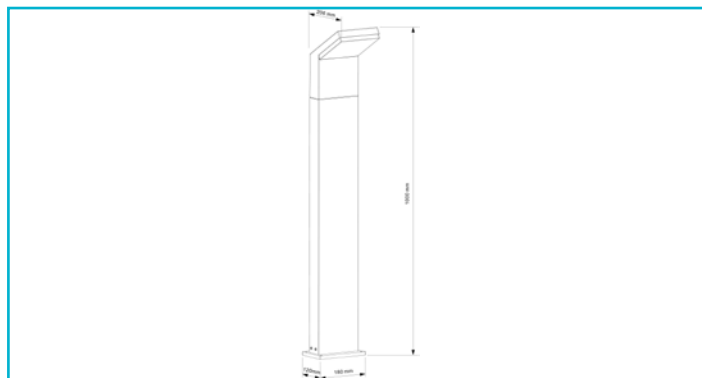


Bollard light**Tucanae 1,000 mm, 18 W, 3,000 K, dark grey**

With its slim, unfussy housing design, the TUCANAE is a modern outdoor light that can be integrated almost anywhere. The 100-cm-high bollard light emits its warm white light diagonally downwards onto paths and other surfaces and, in the MOTION variant, has an integrated twilight switch with adjustable brightness threshold and operating time.

Special features

- Powerful and energy saving
- Uniform illumination
- Adjustable brightness threshold and operating time [733068]

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Plastic
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Bottom panel mounting
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	18 W
Rated Input Voltage Frequency	110-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Connection box
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	2150 lm
Luminous Efficiency	119.4 lm/W
Rated Angle of Reflection	120 Degree
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	206 mm
---------------	--------

Width	180 mm
Height	1000 mm
Base length	120 mm
Base L x W x H	120 x 180 x 10 mm
Base width	180 mm
Base height	10 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65
Max. units per MCB B10	100 PCS
Max. units per MCB B16	150 PCS
Max. units per MCB C10	115 PCS
Max. units per MCB C16	180 PCS
Life Time L70 / B50	30000 h
Switching Cycles	15000
Power Consumption	18 kWh/1000h
EEI	F

