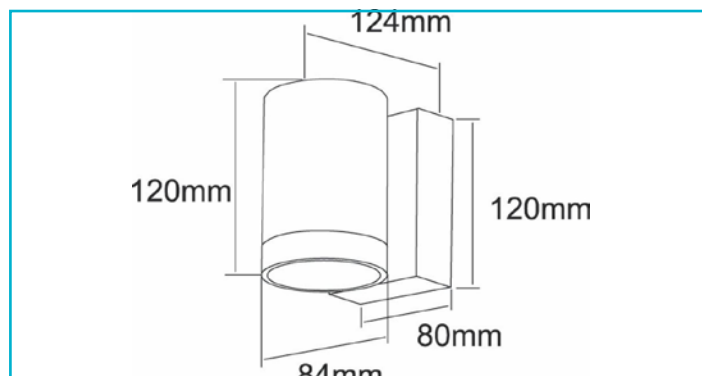


Surface-mounted wall light
Mobby II single, 10 W, DIM, 3,000 K, black


The MOBBY II is a modern IP55 surface-mounted wall light for outdoor use - available either as a SINGLE variant with downward light emission or as a DOUBLE variant with light emission to both sides. The warm white light (3,000 K) of the compact MOBBY II ensures a pleasant inviting ambience on house walls, columns and in other areas.

Housing Material	Aluminium
Housing Color	Black
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Functions	Nightsaver
Protection Class	Protection class I/ protective grounding
Rated Input	9.9 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	810 lm
Luminous Efficiency	81.8 lm/W
Rated Angle of Reflection	53 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	84 mm
Width	124 mm
Height	120 mm
Diameter	84 mm
Base length	120 mm
Base L x W x H	120 x 80 x 34 mm
Base width	80 mm
Base height	34 mm

Working Temperature	-20 to 50 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 55

Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption	10 kWh/1000h
EEI	G

