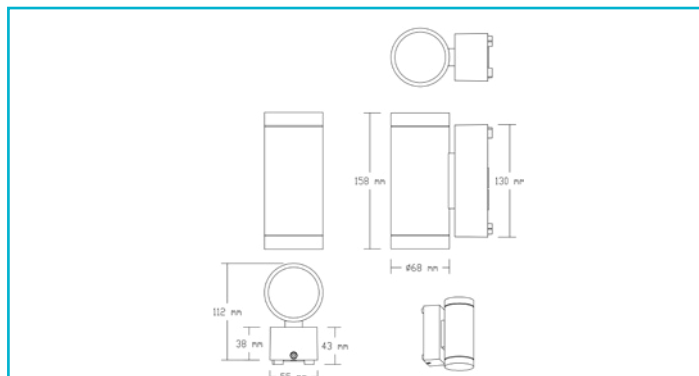


Surface-mounted wall light
ShoreLine Pro Round Up+Down, 2x max. 7.5 W GU10, light grey

Special features

- continuous wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting

Housing Material	Aluminium
Housing Color	Light grey
Material of Lens	Glass
Colour of Lens	Clear
Surface Structure of Lens	Clear
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Functions	Seawater resistant
Protection Class	Protection class I/ protective grounding
max. Power	2x max. 7.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Socket Description	GU10
Socket Quantity	2 PCS
Number of Cable Entries	2 PCS
Dimmable	Yes
Control	Dimmable via optional light source
Motion Detector	No
Height of Illuminant to be used max.	58 mm
Diameter of Illuminant to be used max.	52 mm
Execution	Without lamp
Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below
Height	158 mm
Diameter	68 mm
Base length	43 mm
Base L x W x H	43 x 55 x 130 mm

Base width	55 mm
Base height	130 mm
Product weight	756 g
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 60 °C
IP Protection Class	IP 65
IK Protection Class	IK08

